



## COMBI 410N/3000

Combinada 6 operaciones. Cepillo - regrueso - taladro sierra circular inclinable - carro deslizante - tupi vertical  
6 Operation combination machine. Planer - thicknesser morticer - tilting circular saw - sliding table - spindle moulder  
Combinée 6 opérations. Dégauchisseuse - raboteuse- mortaiseuse scie circulaire inclinable - table coulissante -toupie verticale

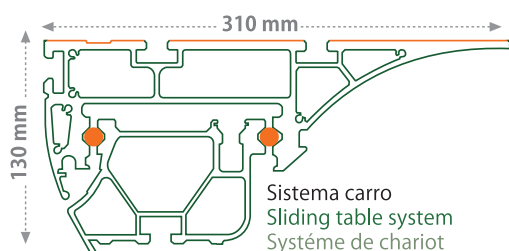

Grupo sierra e incisor  
Saw blade and scoring group  
Groupe disque et inciseur

Corte paralelo  
Cutting width  
Coupe parallèle




Cepillo  
Planer  
Dégauchisseuse

Regrueso  
Thicknesser  
Raboteuse

CEPILLO PLANER DÉGAUCHISSEUSE	
Potencia motor Motor power Puissance moteur	4 Hp. (Tri.380V)
Ancho cepillado Planer width Largeur de coupe	410 mm.
Nº cuchillas Knives number Nº Fers	4 de 410x30x3 mm.
R.p.m. R.p.m. Tr./min.	4.000
Medidas mesa Table dimensions Dimensions table	1.600 x 410 mm.
Ø Toma aspiración Dust collector Ø Ø Buse d'aspiration	100 mm.
REGRUESO THICKNESSER RABOTEUSE	
Ancho regruesado Thicknesser width Largeur de coupe	410 mm.
Grueso máximo Max. Thickness Hauteur Maxi de rabotage	220 mm.
Pasada máxima Max. cutting depth Passe Maxi	5 mm.
Largo mín. pieza Min. Piece length Longueur min. piece	250 mm.
Velocidad de avance Feeding speed Vitesse d'avance	8 m./min.
Medidas mesa Table dimensions Dimensions table	750 x 410 mm.

SIERRA CIRCULAR CIRCULAR SAW SCIE CIRCULAIRE	
Potencia motor Motor power Puissance moteur	5 Hp. (Tri.380V)
Ø Disco / Eje Blade / spindle Ø Ø Disque / alésage	300 x 30 mm.
Capacidad corte Max. Cut Capacité coupe 90°	90 mm.
Capacidad corte Max. Cut Capacité coupe 45°	70 mm.
Disco inclinable Tilting blade Disque inclinable	0-45°
R.p.m. R.p.m. Tr./min.	3.750
Medidas mesa Table dimensions Dimensions table	1.060 x 530 mm.
Corte paralelo Cutting width Coupe en parallèle	390 mm.
Ø Toma aspiración Dust collector Ø Ø Buse d'aspiration	1x100 / 1x40 mm.
INCISOR INCISOR INCISEUR	
Potencia motor Motor power Puissance moteur	0,75 Hp. (Tri.380V)
Ø Disco / Eje Blade / spindle Ø Ø Disque / alésage	100 x 20 mm.
R.p.m. R.p.m. Tr./min.	8.600 mm.

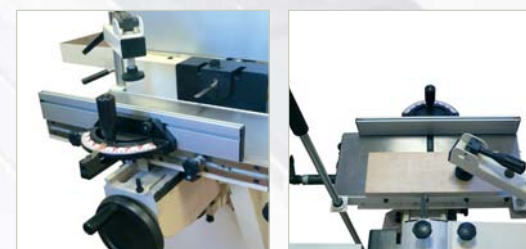

Taladro  
Morticer  
Mortaiseuse

CARRO SLIDING TABLE TABLE COULISSANTE	
Recorrido carro Sliding table travel Course chariot	3.000 mm.
Medidas mesa carro	
Sliding table dimensions Dimensions table chariot	630 x 1.050 mm.
Corte escuadra Cross cut Coupe en équètre	1.600 / 2.800 mm.
Medidas carro Table dimensions Dimensions chariot	3.000 x 310 mm.
TALADRO MORTICER MORTAISEUSE	
Medidas mesa Table dimensions Dimensions table	500 x 210 mm.
Desplazamiento mesa Cross travel Desplacement table	290 x 125 mm.
Recorrido vertical Vertical travel Course verticale	140 mm.
Capacidad taladro Chisel capacity Capacité du mandrin	0 / 16 mm.
Giro broca Rotation direction Sens rotation mèche	↻



Regulación exterior del incisor  
Scoring outer adjust  
Réglage extérieur du inciseur

Control de elevación y velocidad de la Tupi  
Spindle moulder elevation and speed control  
Contrôle d'élévation et de vitesse toupie

TUPI SPINDLE MOULDER TOUPIE	
Potencia motor Motor power Puissance moteur	5 Hp (Tri.380V)
Ø Eje Spindle Ø Ø Arbre	50 mm.
Altura Eje Spindle height Hauteur arbre	140 mm.
Ø Máx. Herramientas Max. Tool Ø Ø Max. outils	140/185 mm.
R.p.m. R.p.m. Tr./min.	3500-5500-7000
Medidas mesa Table dimensions Dimensions table	1.060 x 530 mm.
Ø Toma aspiración Dust collector Ø Ø Buse d'aspiration	100 mm.
	3.000 x 3.300 x 1.100 mm.
	900 Kg.